

The new NKE POP range

Single row deep groove ball bearings

> Quality in the premium class

Single row deep groove bearings are the most frequently used bearing types. The wide spectrum of applications requires maximum guaranteed performance with highest possible cost effectiveness.

Optimised precision

The new NKE POP range of single row deep groove ball bearings offers numerous technical advantages, such as reduced running noise, longer lubricant service life, lower starting torque, ... and all these combined with the highest level of cost effectiveness.



NKE POP range

(Stock)

6000 - 6012
6200 - 6212
6300 - 6310

Variants: open, 2RS2, 2Z

Radial clearance groups: CN (standard) C3




▲ 100% noise testing guarantees highest precision.

Austrian quality

100% quality guarantee – All NKE bearings undergo stringent and documented quality inspection. By using advanced test and measuring equipment as well as a rigorous quality policy, we can guarantee that every single batch of bearings delivered to you is of the highest quality standards.


100% noise testing – The new NKE POP range single row deep groove ball bearings ensures highest precision with low running noise.

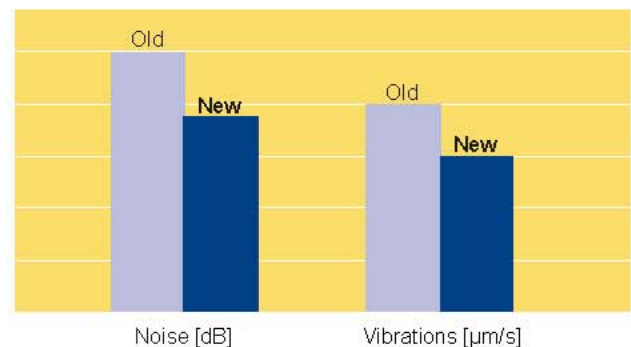

▲ The new NKE POP range single row deep groove ball bearings with reduced running noise and vibrations.

Technical advantages of the NKE POP range: Single row deep groove ball bearings

> Cost effectiveness and precision



Newly developed seals


(double-lip labyrinth RS2)

> Improved protection against contamination with low friction, better retention of grease



New, special low-noise lubricant

> Lower starting torque over a wide temperature range




Superior surface finish on raceways

> Reduced friction, lower operating temperature



Closer grade balls

> More uniform running and lower noise



Reduced running noise

> Though 100% noise testing with stringent limit values

Technical data of the lubricant:

RS2 seal



▲ The newly developed NKE double-lip labyrinth seal.

Operating temperature:	-50 to +150°C
Kinematic viscosity v_{40}	26 [mm ² /s]
Worked penetration	250 [1/10mm]
Drop point	190°C
Thickener	Lithium complex
Base oil	Polyolester + diester and additives
Technical characteristics	<ul style="list-style-type: none"> - Low running noise - Minimal starting torque even at low temperatures - Long service life over a wide temperature range



▲ NKE headquarters in Steyr – more than 4,600 m² for core functions such as engineering, production, logistics, quality assurance, marketing and sales.

NKE AUSTRIA

NKE AUSTRIA GmbH is a premium bearing manufacturer with headquarters in Steyr, Austria. The company was founded in 1996 by a group of senior staff members of the former Steyr Wälzlager.

NKE manufactures both standard and special bearings for all industrial applications. Our core competences – engineering, product development, final processing of components, assembly, quality assurance, logistics, sales and marketing – are centralised in Steyr. The site is accredited with ISO 9001:2000 (design, development, manufacturing and distribution of bearings) and ISO 14001.

We offer:

- Standard bearings with a comprehensive stock range
- Tailor-made bearings for special requirements
- Technical service (e.g. consulting, documentation, training etc.)

NKE bearings are distributed through 14 international representative offices and more than 200 distribution outlets in over 55 countries.



Austria
Quality Seal
No. 30.276

For more information please contact:



NKE AUSTRIA GmbH

Ennser Strasse 41a,
A-4407 Steyr-Gleink, Austria
Tel +43 7252 86667
Fax +43 7252 86667 59
E-mail office@nke.at
www.nke.at

Your local NKE partner:



Every care has been taken to ensure the accuracy of the information contained in this publication, but NKE accepts no liability due to errors or omissions. NKE reserves the right to change any product specifications.
All rights reserved. © NKE AUSTRIA GmbH