


# SMT


## Elastic Bearings

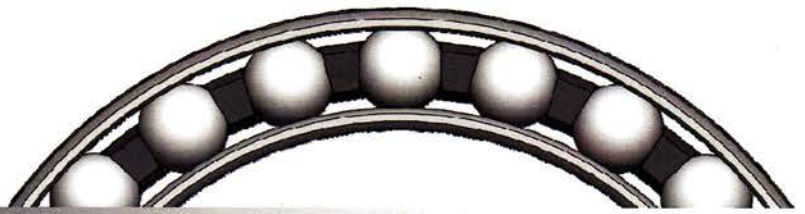

### ©Product Specifications

#### ●Standard Specifications

Inner and Outer Rings	SAE52100、AISI440C
Ball	SAE52100、AISI440C
Retainer	NYLON66 GLASS FIBER 30%

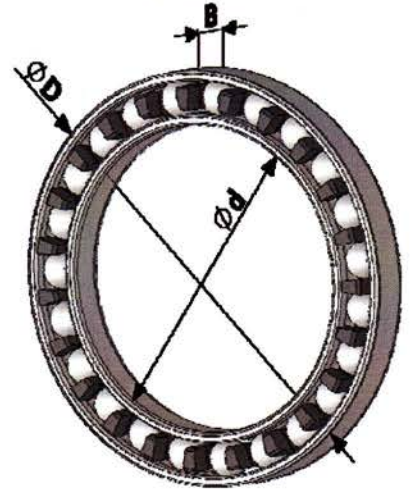

#### ●Dimensions Produced

Basic Part No.	d	D	B	Basic Load Ratings (※)			
				Cr		Cor	
				N	kgf	N	kgf
No. 1	14	19.5	3	1530	156	1030	105
No. 2	20	26.4	4.5	2150	219	1650	169
No. 3	25	34	4	3700	375	2900	295
No. 4			6				
No. 5	30	40	5	4300	440	3600	365
No. 6			7				
No. 7	35	48.2	5	7700	785	6450	660
No. 8			8				
No. 9	44	60	6.3	10000	1020	8900	910
No. 10			9				
No. 11	56	75.9	8.7	14100	1440	13200	1350
No. 12			11				
No. 13	70	96.7	14.5	22500	2300	22000	2250

※Bearing may be damaged even within the load ratings, depending on the usage.  
Please consult with SMT before use.

\*The performance data and expressions are provided as a general guide only.  
The specifications are subject to change without notice for the improvement of performance.

# SMT

## Nankai Seiko Co., Ltd.

3-6-1, Techno Stage, Izumi, Osaka 594-1144, Japan.

Tel: 0725-53-5563 Fax: 0725-53-5576

E-mail: overseas@smtbearing.com