



Deep Groove Ball Bearings
wideseries 62200

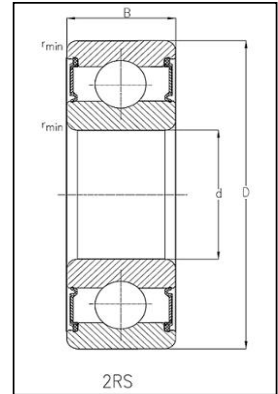


Bearing Type	Dimensions				Load Ratings		Speed Ratings (1/min)		
	d (mm)	D (mm)	B (mm)	rmin (mm)	Ciso (kN)	Coiso (kN)	Thermal Reference Speed	Speed Limit	
								Grease	Oil
62200	10	30	14	0,6	5,97	2,63	23300	28000	34000
62201	12	32	14	0,6	6,89	3,09	22200	26000	32000
62202	15	35	14	0,6	7,73	3,76	19900	22000	28000
62203	17	40	16	0,6	9,55	4,76	18100	19000	24000
62204	20	47	18	1	12,79	6,58	16000	17000	20000
62205	25	52	18	1	14,02	7,88	14000	14000	18000
62206	30	62	20	1	19,45	11,26	12000	12000	15000
62207	35	72	23	1,1	25,67	15,30	10400	10000	13000
62208	40	80	23	1,1	29,11	17,90	9300	9000	11000
62209	45	85	23	1,1	32,71	20,46	8800	8500	11000
62210	50	90	23	1,1	35,07	23,18	8000	8000	10000

Sabit Bilyalı Rulmanlar
Geniş Seri 62300

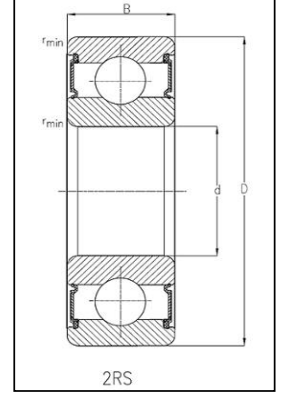

Rulman Tipi	Ölçüler				Yük Taşıma Kapasitesi		Devir Sayısı (1/min)		
	d (mm)	D (mm)	B (mm)	r _{min} (mm)	C _{iso} (kN)	Co _{iso} (kN)	Termal Referans Hız	Limit Hız	
								Gres	Yağ
62300	10	35	17	0,6	8,1	3,44	21100	26000	32000
62301	12	37	17	1	9,71	4,19	20000	22000	28000
62302	15	42	17	1	11,33	5,35	17500	19000	24000
62303	17	47	19	1	13,63	6,62	14700	17000	22000
62304	20	52	21	1,1	15,94	7,88	14400	15000	19000
62305	25	62	24	1,1	23,62	12,13	12200	13000	16000
62306	30	72	27	1,1	28,16	15,82	10400	11000	13000
62307	35	80	31	1,5	33,32	19,15	10300	9500	12000
62308	40	90	33	1,5	40,72	23,94	9000	8500	11000
62310	50	110	40	2	61,99	38,19	7300	6700	8500

Sabit Bilyalı Rulmanlar
Geniş Seri 63000

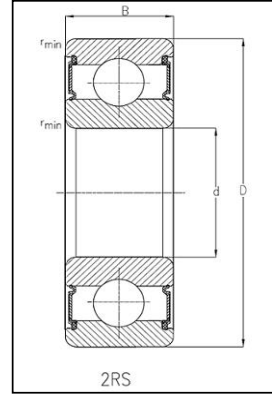

Rulman Tipi	Ölçüler				Yük Taşıma Kapasitesi		Devir Sayısı (1/min)		
	d (mm)	D (mm)	B (mm)	rmin (mm)	Ciso (kN)	Coiso (kN)	Termal Referans Hız	Limit Hız	
								Gres	Yağ
63000	10	26	12	0,3	4,58	1,97	28000	34000	40000
63001	12	28	12	0,3	5,1	2,37	24000	30000	38000
63002	15	32	13	0,3	5,59	2,84	21500	26000	32000
63003	17	35	14	0,3	6	3,25	20300	22000	28000
63004	20	42	16	0,6	9,38	5,03	18000	19000	24000
63005	25	47	16	0,6	10,07	5,83	16000	16000	20000
63006	30	55	19	1	13,23	8,28	13000	14000	17000
63007	35	62	20	1	15,98	10,28	11600	12000	15000
63008	40	68	21	1	16,77	11,55	10600	11000	14000